




NANO COATINGS
FOR RETAIL SIZE





• HOMEWOOD

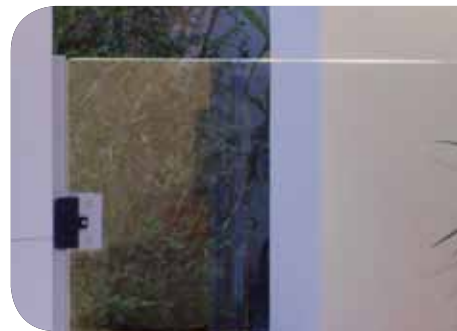

• HOMESHINE

HOME SURFACE PROTECTION







• HOMETEX

HOMESHINE

Homeshine protects bathroom and kitchen ceramic and glass surfaces from residual lime, moss, fungus and stains, gives easy clean effect.




APPLICATION

-  Surface should be free of any dust, dirt, oil or water.
-  Surface should be sprayed around 25 times for one square meter.
-  Surface should be buffed immediately with dry cotton cloth.
-  Curing time is 24 h.

SPECIFICATIONS

Volume	150 ml
Application surface type	Home glass and ceramic
Durability	1 year
Temperature durability	275° C
Chemical resistance	13>Ph>1
Consumption	5-6 ml/m ²
Coating thickness	85-100 nm
Water repellency	✓
Oil repellency	✓
Lime stains	Reducing %90
Shelf life	2 years
Keeping conditions	-3°C to +30°C
Curing period	24 h
Box includes	16 pieces

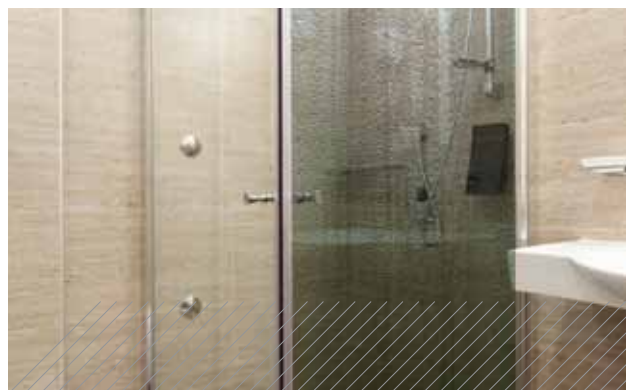





HOMEWOOD

Homewood protects your wooden goods, wooden home and garden furnitures, doors, windows and other natural wooden surfaces from water and stain, and prolongs lifetime.



APPLICATION

-  Surface should be clean of any dust, dirt, oil or water.
-  Application area should be ventilated well.
-  Surface is sprayed on one square meter 160-220 times until becomes slightly wet.
-  Curing time is 24 h.

SPECIFICATIONS

Volume	150 ml
Application surface type	Home natural wooden parts
Durability	Up to 6 months
Consumption	40-60 ml/m ²
Coating thickness	~60-70 nm
Water repellency	✓
Oil repellency	✓
Breathability	✓
Temperature durability	110° C
Shelf life	2 years
Keeping conditions	-3°C to +30°C
Curing period	24 h
Box includes	16 pieces







HOMETEX

Hometex protects fabric parts of your fabric, suet upholstery surfaces, curtains and carpets from water, liquids and stain, helps to be cleaned easily when contaminated.



Water Repellency ISO 4920
Rating 100/100

APPLICATION

-  Surface should be clean of any dust, dirt, oil or water.
-  Application area should be ventilated well.
-  Surface is sprayed on one square meter 80-100 times until becomes slightly wet.
-  Curing time is 24 h.

SPECIFICATIONS

Volume	500 ml
Application surface type	Home fabric upholstery
Durability	Up to 6 months
Temperature durability	110° C
Chemical resistance	11>Ph>1
Consumption	80-100 ml/m ²
Coating thickness	~75-100 nm
Water repellency	✓
Oil repellency	✓
Breathability	✓
Shelf life	2 years
Keeping conditions	-3°C to +30°C
Curing period	24 h
Box includes	12 pieces





- ZR53
- METALCOAT F2



- GLASSHIELD

AUTO SURFACE PROTECTION



- CABINCARE
- NANO SEAT PROTECT

GLASSHIELD

Glassshield ensures safe driving in rainy conditions, easy clean, UV protection and stain free effect protects your automobile's glasses and mirrors.

APPLICATION



Surface should be free of any dust, dirt, oil or water.



Application should be made in a shade area.



Surface should be sprayed around 20 times for one square meter.



Surface should be buffed immediately with dry cotton cloth.



Curing time is 24 h.

SPECIFICATIONS







Volume	50 ml
Application surface type	Glass
Durability	2 years/80000 wipes/45000 km
Temperature durability	275° C
Chemical resistance	13>Ph>1
Consumption	5 ml/ m ²
Coating thickness	75-100 nm
Water repellency	✓
Oil repellency	✓
Shelf life	2 years
Keeping conditions	-3°C to +30°C
Curing period	24 h
Box includes	15 pieces



ZR53

Nasiol ZR53 is an ultimate nano ceramic protection system against all environmental effects. Its unique technology enables it to achieve a thick coating and this coating prevents your car against bird droppings, acid rains, UV lights. ZR53 coated surfaces enables you to clean your car easily with less time and energy. Your car will stay more clean and shiny with Nasiol ZR53.

APPLICATION

-  Surface should be prepared accordingly.
-  Surface should be free of any dust, dirt, oil or water.
-  Application should be made in a shade area.
-  Product is spreaded with a pad.
-  Surface should be buffed immediately with dry microfiber cloth.
-  Curing time is 48 h.

SPECIFICATIONS






Volume	50 ml
Application surface type	Car and motorcycle paint
Durability	3 years 150 washings: Normal conditions -20°C to +35°C, ph<12 detergent 1 year/50 washings: Heavy conditions -40°C to +40°C, ph>12 detergent
Temperature durability	150° C
Chemical resistance	12>Ph>1
Consumption	4 ml/m ²
Coating thickness	700-1000 nm
Hardness	9H Pencil
Scratch resistance	✓
Water repellency	✓
Oil repellency	✓
Hologram reducing	✓
Shelf life	1 year, 1W after opening bottle
Keeping conditions	-3°C to +30 °C
Curing period	6h pre, 48 h totally
Box includes	10 pieces



METALCOAT F2

MetalCoat F2 protects your car's body, rims, engine plastic, metal parts, headlights from sun, bird droppings, acid rains. Applied cars gets less dirty, cleaned easily and gains a deep glassy shine.

APPLICATION

-  Surface should be free of any dust, wax, dirt, oil, water or etc.
-  Application should be made in a shade area.
-  Surface should be sprayed around 20-30 times for one square meter.
-  Surface should be buffed immediately with dry micro fiber cloth.
-  Curing time is 24 h.

SPECIFICATIONS

Volume	50 ml
Application surface type	Automotive paint, plastic, metal
Durability	1 year 50 washings: Normal conditions -20°C to +35°C, ph<12 detergent 6 months/30 washings: Heavy conditions -40°C to +40°C, ph>12 detergents
Consumption	5-8 ml/m ²
Coating thickness	200-300 nm
Water repellency	✓
Oil repellency	✓
Temperature durability	275° C
Chemical resistance	12>Ph>1
Shelf life	1 year, 1w after opening bottle
Keeping conditions	-3°C to +30°C
Curing period	12 h
Box includes	20 pieces



CABINCARE

Cabincare protects fabric parts of your car from water, liquid and stain, gives easy clean effect.



Water Repellency ISO 4920
Rating 100/100

APPLICATION



Surface should be free of any dust, wax, dirt, oil, water or etc.



Application area should be ventilated well.



Surface should be sprayed around 80 -100 times for one square meter.



Curing time is 24 h.

SPECIFICATIONS

Volume	500 ml
Application surface type	Car textile, suede, nubuck
Durability	Up to 6 months
Temperature durability	110° C
Chemical resistance	11>Ph>1
Consumption	80-100 ml/m ²
Coating thickness	~75-100 nm
Water repellency	✓
Oil repellency	✓
Breathability	✓
Shelf life	2 years
Keeping conditions	-3°C to +30°C
Curing period	24 h
Box includes	12 pieces



NANO SEAT PROTECT

New Car Scented

Nano Seat Protect, protects fabric parts of your car from liquid, water and stain, gives easy clean effect with new car fragrance.



Water Repellency ISO 4920
Rating 100/100

APPLICATION



Surface should be clean of any dust, dirt, oil or water.



Application area should be ventilated well.



Surface is sprayed on one square meter 80 -100 times until becomes slightly wet.



Curing time is 24 h.

SPECIFICATIONS

Volume	500 ml
Application surface type	Car textile, suede, nubuck
Durability	Up to 4 months
Temperature durability	110° C
Chemical resistance	10>Ph>2
Consumption	80 -100 ml/m ²
Coating thickness	~75 -100 nm
Water repellency	✓
Oil repellency	✓
Breathability	✓
Shelf life	1 year
Keeping conditions	-3°C to +30°C
Curing period	24 h
Box includes	20 pieces



Products are under quality.

Precisely manufactured in compliance with standarts.



We respect natural life.

Our riskless technologies are assured with EU standarts.





MARINE SURFACE PROTECTION

• MARINETEX



• METALSHINE



• ANTIMOSS



• GLASSHIELD MARINE



• DECKCARE








GLASSHIELD MARINE

Glassshield Marine ensures safe cruising against rainy and wet conditions. Sea vehicle glasses stay more clean and gains easy clean effect.



APPLICATION

-  Surface should be free of any dust, wax, dirt, oil or water.
-  Application should be made in a shade area.
-  Surface should be sprayed around 20 times for one square meter.
-  Surface should be buffed immediately with dry cotton cloth.
-  Curing time is 24 h.

SPECIFICATIONS

Volume	50 ml
Application surface type	Yacht glass and windows
Durability	2 years/20000 miles
Temperature durability	275° C
Chemical resistance	13>Ph>1
Consumption	5 ml/m ²
Coating thickness	75-80 nm
Water repellency	✓
Oil repellency	✓
Salty water icing vision	Reducing %95
Shelf life	2 years
Keeping conditions	-3°C to +30°C
Curing period	24 h
Box includes	25 pieces








ANTIMOSS

Antimoss, protects painted boat and yacht body from environmental effects, fungus and salty water, gives easy clean and slow contamination. It is used as an ultimate nano top coat.



APPLICATION

-  Surface should be free of any dust, wax, dirt, oil or water.
-  Application should be made in a shade area.
-  Surface should be sprayed around 25 times for one square meter.
-  Surface should be buffed immediately with dry microfiber cloth.
-  Curing time is 24 h.

SPECIFICATIONS

Volume	150 ml
Application surface type	Sea vehicles paint
Durability	1 year
Consumption	5-7 ml/m ²
Coating thickness	200-300 nm
Water repellency	✓
Oil repellency	✓
Temperature durability	275° C
Chemical resistance	12>Ph>1
Shelf life	1 year, 1w after opening bottle
Keeping conditions	-3°C to +30°C
Curing period	24 h
Box includes	16 pieces







MARINETEX

Marinetex protects fabric parts of your boat's seats, ropes, tents from water and stain and extends lifetime.



APPLICATION

-  Surface should be free of any dust, wax, dirt, oil or water.
-  Application area should be ventilated well.
-  Surface is sprayed on one square meter 80-100 times until becomes slightly wet.
-  Curing time is 24 h.

**Water Repellency ISO 4920
Rating 100/100**

SPECIFICATIONS






Volume	500 ml
Application surface type	Yacht textile, suede, nubuck, leather
Durability	Up to 6 months
Temperature durability	110° C
Chemical resistance	11>Ph>1
Consumption	80-100 ml/m ²
Coating thickness	~75-100 nm
Water repellency	✓
Oil repellency	✓
Breathability	✓
Shelf life	2 years
Keeping conditions	-3°C to +30°C
Curing period	24 h
Box includes	12 pieces

METALSHINE

Metalshine, protects your marine metal parts from uv lights, salty water and stain, gives easy clean effect with a deep shine.



APPLICATION

-  Surface should be free of any dust, wax, dirt, oil, water or etc.
-  Application should be made in a shade area.
-  Surface should be sprayed around 20 times for one square meter.
-  Surface should be buffed immediately with dry micro fiber cloth.
-  Curing time is 24 h.

SPECIFICATIONS

Volume	50 ml
Application surface type	Sea vehicles metal parts
Durability	1 year
Consumption	5 ml/m ²
Coating thickness	200-300 nm
Water repellency	✓
Oil repellency	✓
Temperature durability	275° C
Chemical resistance	12>Ph>1
Shelf life	1 year, 1w after opening bottle
Keeping conditions	-3°C to +30°C
Curing period	24 h
Box includes	25 pieces







DECKCARE

Deckcare protects wooden parts of boats and yachts from salty water and stain, prolongs lifetime.




APPLICATION

-  Surface should be free of any dust, wax, dirt, oil or water.
-  Application area should be ventilated well.
-  Surface is sprayed on one square meter 140-200 times until becomes slightly wet.
-  Curing time is 24 h.

SPECIFICATIONS

Volume	150 ml
Application surface type	Marine natural wooden parts
Durability	Up to 6 months
Consumption	35-50 ml/m ²
Coating thickness	~60-70 nm
Water repellency	✓
Oil repellency	✓
Breathability	✓
Temperature durability	110° C
Shelf life	2 years
Keeping conditions	-3°C to +30°C
Curing period	24 h
Box includes	20 pieces

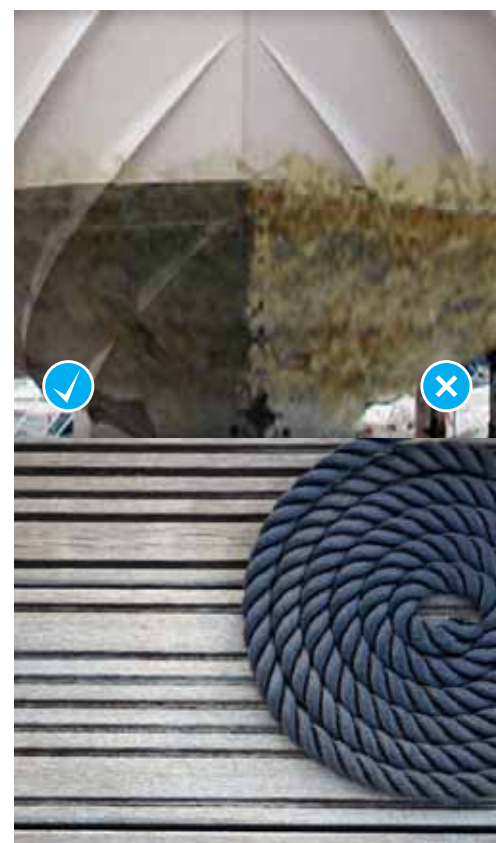

HERE IS JUST A QUICK
OVERVIEW OF OUR MAIN
PRODUCT FEATURES.

WE MANUFACTURE

RESPECTFULL PRODUCTS FOR
YOUR LIFE TO MAKE IT EASY

KEY FEATURES



SAFE VISION



WATER REPELLENT



HIGH GLOSS



CHEMICAL RESISTANCE



EASY CLEAN



STAIN FREE



SCRATCH RESISTANCE



• GOGLIDE



• PERWEAR



PERSONAL GOODS PROTECTION



• PERWEAR



• PERSHINE








• PERSHOES

PERSHINE

Pershine protects your personal accessory - watches, mobiles, electronic devices, jewellery, glasses - from uv lights, water and stain, gives easy clean effect.



APPLICATION

-  Surface should be free of any dust, dirt, oil or water.
-  Application should be made in a shade area.
-  Surface should be sprayed around 50-70 times for one square meter.
-  Surface should be buffed immediately with dry clean microfiber cloth.
-  Curing time is 24 h.

SPECIFICATIONS

Volume	50 ml
Application surface type	Plastic, metal, glass
Durability	1 year
Consumption	5-7 ml/m ²
Coating thickness	200-300 nm
Water repellency	✓
Oil repellency	✓
Temperature durability	275° C
Chemical resistance	12>Ph>1
Shelf life	1 year, 1m after opening bottle
Keeping conditions	-3°C to +30°C
Box includes	25 pieces







PERWEAR

Perwear protects personal clothes from water, liquid and stain, gives easy clean effect.



APPLICATION

-  Surface should be free of any dust, wax, dirt, oil or water.
-  Application area should be ventilated well.
-  Surface is sprayed on one square meter 200 times until becomes slightly wet.
-  Curing time is 24 h.

**Water Repellency ISO 4920
Rating 100/100**

SPECIFICATIONS

Volume	150 ml
Application surface type	Textile, suede, nubuck
Durability	Up to 1 year 15 washings
Temperature durability	110° C
Chemical resistance	11>Ph>1
Consumption	50-60 ml/m ²
Coating thickness	~75-100 nm
Water repellency	✓
Oil repellency	✓
Breathability	✓
Shelf life	2 years
Keeping conditions	-3°C to +30°C
Curing period	24 h
Box includes	20 pieces







PERSHOES

Pershoes is easily applied on textile, suede, nubuck and leather shoes to protect from water and stain.



APPLICATION

-  Surface should be free of any dust, wax, dirt, oil or water.
-  Application area should be ventilated well.
-  Each shoe is sprayed 30-40 times until becomes slightly wet.
-  Curing time is 24 h.

**Water Repellency ISO 4920
Rating 100/100**

SPECIFICATIONS





Volume	50 ml
Application surface type	Textile, suede, nubuck
Durability	Up to 6 months
Chemical resistance	12>Ph>1
Temperature durability	110° C
Consumption	50-60 ml/m ²
Coating thickness	~75-100 nm
Water repellency	✓
Oil repellency	✓
Breathability	✓
Shelf life	2 years
Keeping conditions	-3°C to +30°C
Curing period	24 h
Box includes	25 pieces

GOGLIDE

Goglide is to achieve more clear vision in the conditions of rain, mud and snow on goggles and helmets.



APPLICATION

-  Surface should be free of any dust, dirt, oil or water.
-  Surface should be sprayed around 50 times for one square meter.
-  Surface should be buffed immediately with dry microfiber cloth.
-  Curing time is 24 h.

SPECIFICATIONS

Volume	50 ml
Application surface type	Goggles and helmets
Durability	6 months
Temperature durability	275° C
Chemical resistance	13>Ph>1
Consumption	5-6 ml/m ²
Coating Thickness	85-100 nm
Water repellency	✓
Oil repellency	✓
Shelf life	2 years
Keeping conditions	-3°C to +30°C
Curing period	24 h
Box includes	25 pieces



Nasiol is the premier nano coating manufacturer and pioneer in Turkey, our services and expertise spread in Europe and worldwide.

Our scientific endeavors lie here. Consistent and continuous development of nanotechnology for home and industrial use, accessible and practical, only the very best and setting world-class industry standards not only in our nano coatings but in our supportive business practices for our worldwide enterprise partners.



ARTEKYA TECH. LTD.
İkitelli OSB Heskop Sitesi
M10-189 İstanbul / TURKEY
Tel : +90 212 670 13 95
info@artekya.com
www.nasiol.com

